


# WEBENCH<sup>®</sup> Design Report

Design : 4414378/5 UCC28722DBVR  
 UCC28722DBVR 110.0V-130.0V to 5.37V @ 2.0A

VinMin = 110.0V  
 VinMax = 130.0V






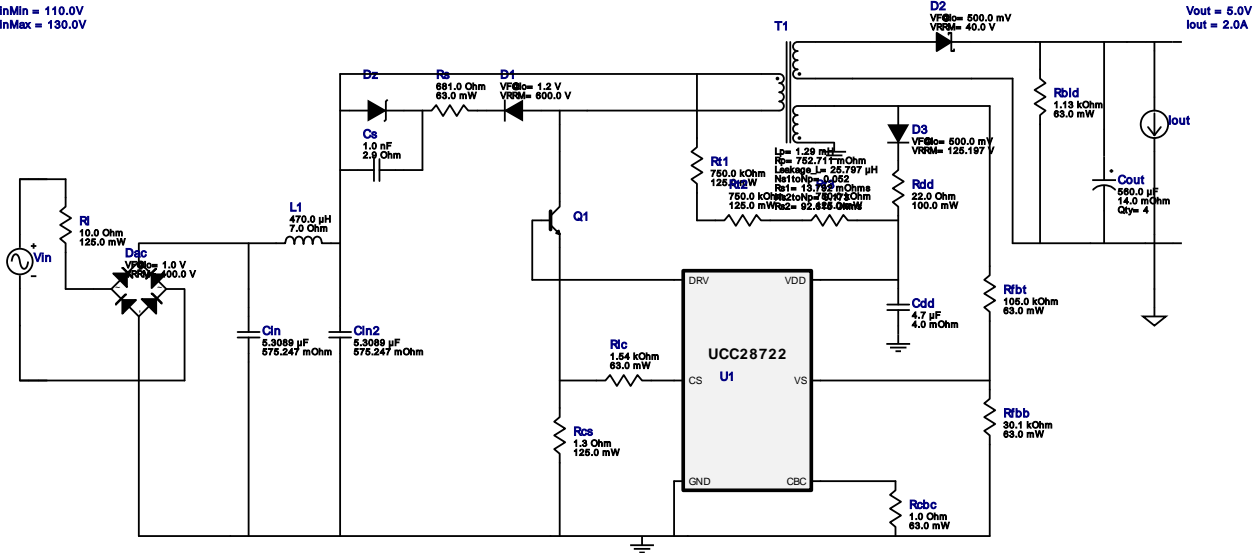








1. R1bld is a starting point, but may need to be experimented with in order to get minimum current needed to hold Vout at no load. R1c and the feedback resistors may also need adjustment based on the actual transformer used. For more information please click the design assistance button.







## Electrical BOM







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	Cdd	MuRata	GRM21BR61E475KA12L Series= X5R	Cap= 4.7 uF ESR= 4.0 mOhm VDC= 25.0 V IRMS= 0.0 A	1	\$0.03	0805 7 mm <sup>2</sup>
2.	Cin	CUSTOM	CUSTOM Series= ?	Cap= 5.3089 uF ESR= 575.25 mOhm VDC= 275.769 V IRMS= 406.852 mA	1	NA	CUSTOM 0 mm <sup>2</sup>
3.	Cin2	CUSTOM	CUSTOM Series= ?	Cap= 5.3089 uF ESR= 575.25 mOhm VDC= 275.769 V IRMS= 406.852 mA	1	NA	CUSTOM 0 mm <sup>2</sup>
4.	Cout	Panasonic	16SVPF560M Series= 1273	Cap= 560.0 uF ESR= 14.0 mOhm VDC= 16.0 V IRMS= 4.95 A	4	\$0.61	CAPSMT_62_E12 106 mm <sup>2</sup>
5.	Cs	MuRata	GRM188R72E102KW07D Series= X7R	Cap= 1.0 nF ESR= 2.9 Ohm VDC= 250.0 V IRMS= 90.0 mA	1	\$0.02	0603 5 mm <sup>2</sup>
6.	D1	Bourns	CD214B-F3600	VF@Io= 1.2 V VRRM= 600.0 V	1	\$0.14	SMB 44 mm <sup>2</sup>
7.	D2	Diodes Inc.	B340A-13-F	VF@Io= 500.0 mV VRRM= 40.0 V	1	\$0.11	SMA 37 mm <sup>2</sup>
8.	D3	CUSTOM	CUSTOM	VF@Io= 500.0 mV VRRM= 125.197 V	1	NA	CUSTOM 0 mm <sup>2</sup>







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
9.	Dac	Diodes Inc.	HD04-T	VF@Io= 1.0 V VRRM= 400.0 V	1	\$0.12	 MiniDIP 62 mm <sup>2</sup>
10.	Dz	ON Semiconductor	BZG03C150G	Zener	1	\$0.12	 SMA 37 mm <sup>2</sup>
11.	L1	Bourns	SDR0403-471KL	L= 470.0 µH DCR= 7.0 Ohm	1	\$0.18	 SDR0403 28 mm <sup>2</sup>
12.	Q1	STMicroelectronics	STN2580	Bipolar Transistor	1	\$0.18	 SOT-223 76 mm <sup>2</sup>
13.	Rbld	Vishay-Dale	CRCW04021K13FKED Series= CRCW..e3	Res= 1.13 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm <sup>2</sup>
14.	Rcbc	Vishay-Dale	CRCW04021R00FKED Series= CRCW..e3	Res= 1.0 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm <sup>2</sup>
15.	Rcs	Vishay-Dale	CRCW08051R30FKEA Series= CRCW..e3	Res= 1.3 Ohm Power= 125.0 mW Tolerance= 1.0%	1	\$0.01	 0805 7 mm <sup>2</sup>
16.	Rdd	Susumu Co Ltd	RR1220Q-220-D Series= 264	Res= 22.0 Ohm Power= 100.0 mW Tolerance= 0.5%	1	\$0.01	 0805 7 mm <sup>2</sup>
17.	Rfbb	Vishay-Dale	CRCW040230K1FKED Series= CRCW..e3	Res= 30.1 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm <sup>2</sup>
18.	Rfbt	Vishay-Dale	CRCW0402105KFKED Series= CRCW..e3	Res= 105.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm <sup>2</sup>
19.	RI	Vishay-Dale	CRCW080510R0FKEA Series= CRCW..e3	Res= 10.0 Ohm Power= 125.0 mW Tolerance= 1.0%	1	\$0.01	 0805 7 mm <sup>2</sup>
20.	Rlc	Vishay-Dale	CRCW04021K54FKED Series= CRCW..e3	Res= 1.54 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm <sup>2</sup>
21.	Rs	Vishay-Dale	CRCW0402681RFKED Series= CRCW..e3	Res= 681.0 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm <sup>2</sup>
22.	Rt1	Panasonic	ERJ-6ENF7503V Series= 225	Res= 750.0 kOhm Power= 125.0 mW Tolerance= 1.0%	1	\$0.01	 0805 7 mm <sup>2</sup>
23.	Rt2	Panasonic	ERJ-6ENF7503V Series= 225	Res= 750.0 kOhm Power= 125.0 mW Tolerance= 1.0%	1	\$0.01	 0805 7 mm <sup>2</sup>
24.	Rt3	Panasonic	ERJ-6ENF7503V Series= 225	Res= 750.0 kOhm Power= 125.0 mW Tolerance= 1.0%	1	\$0.01	 0805 7 mm <sup>2</sup>
25.	T1	CUSTOM	CUSTOM	Lp= 1.29 mH Rp= 752.711 mOhm Leakage_L= 25.797 µH Ns1toNp= 0.052 Rs1= 13.792 mOhms Ns2toNp= 0.173 Rs2= 92.615 Ohms	1	NA	CUSTOM 0 mm <sup>2</sup>
26.	U1	Texas Instruments	UCC28722DBVR	Switcher	1	\$0.25	 R-PDSO-G7 55 mm <sup>2</sup>

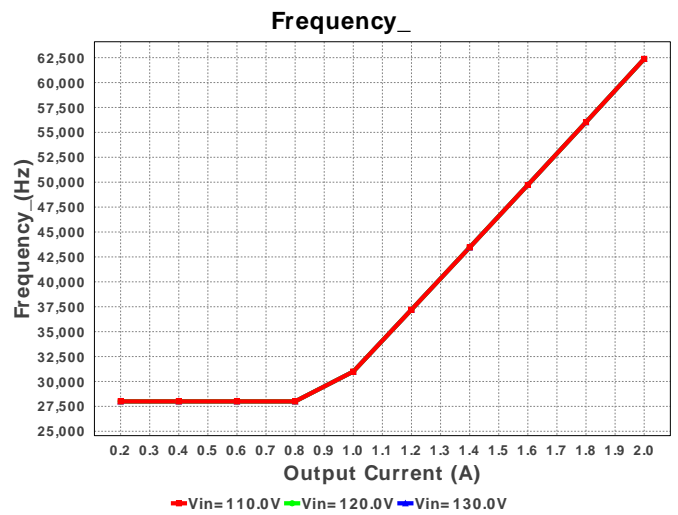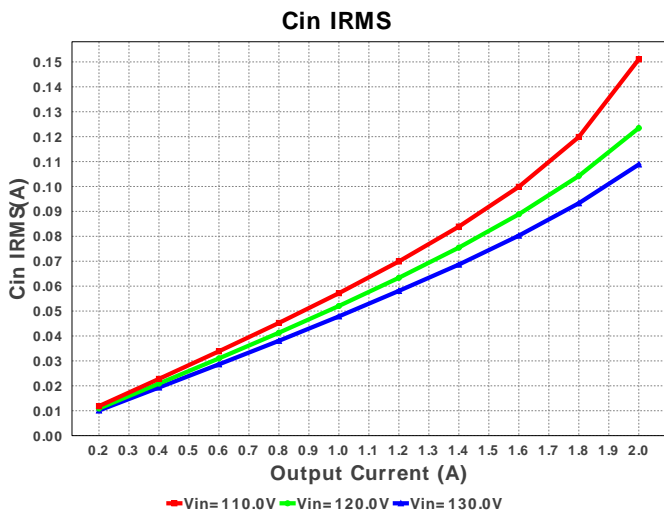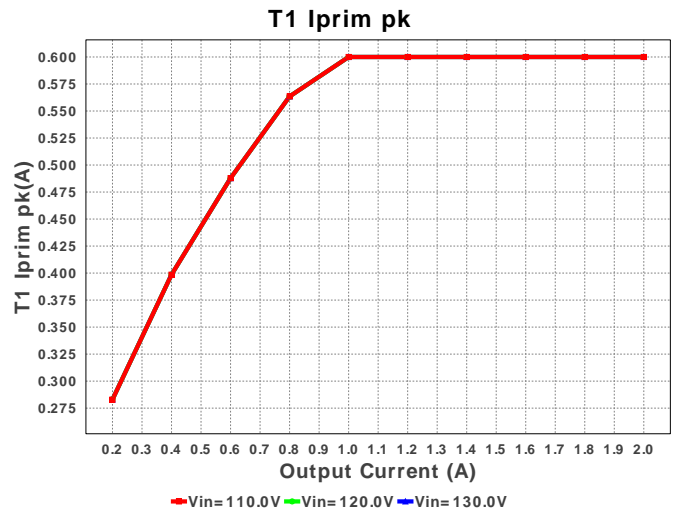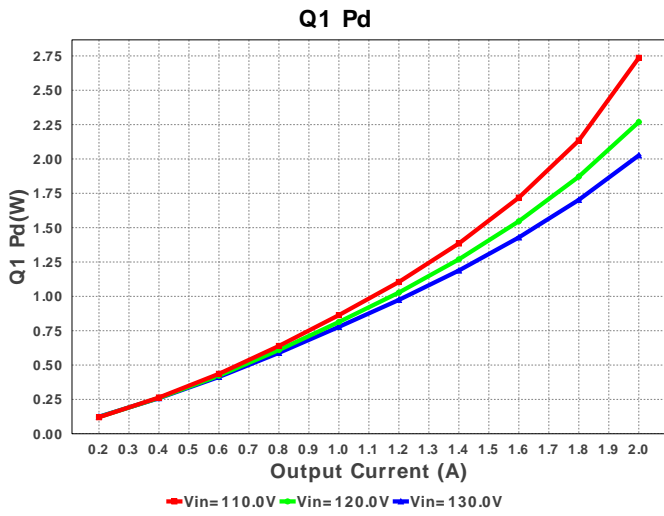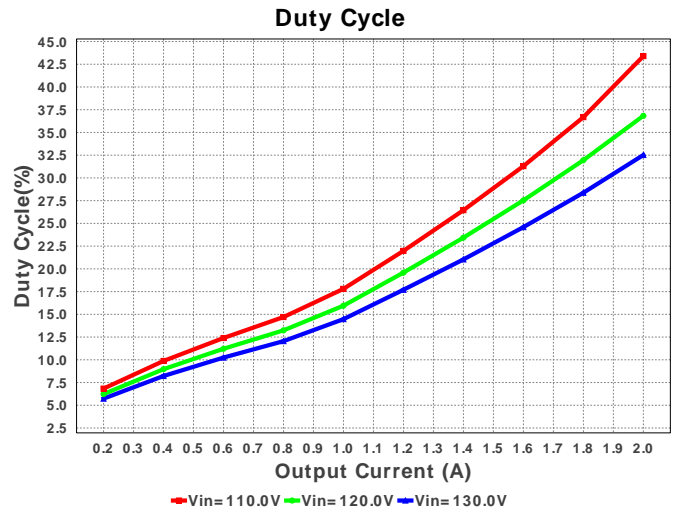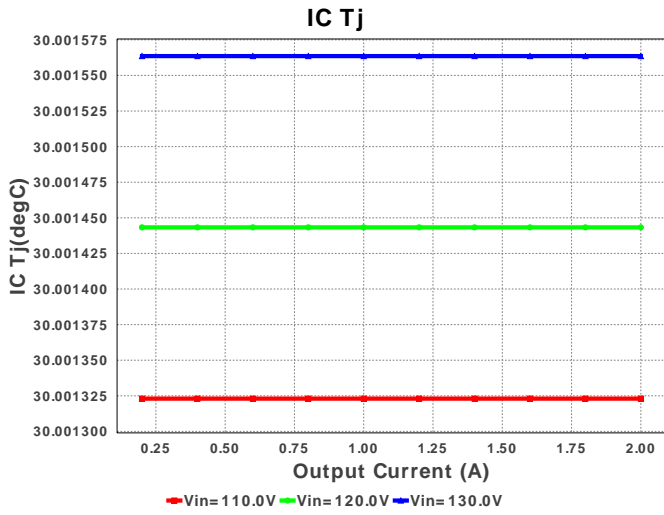

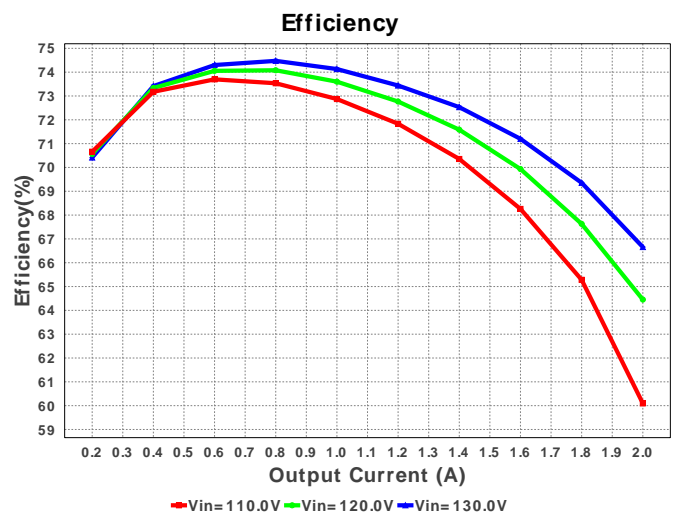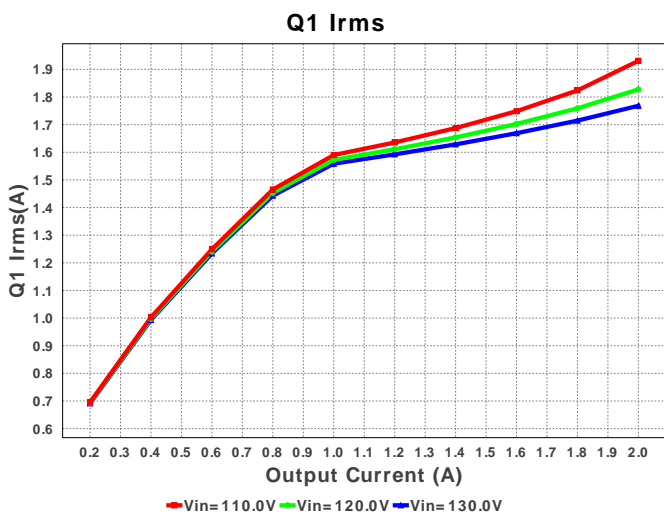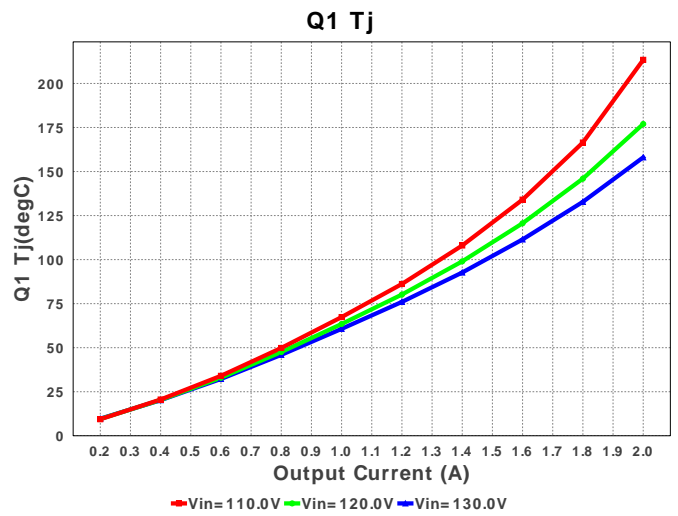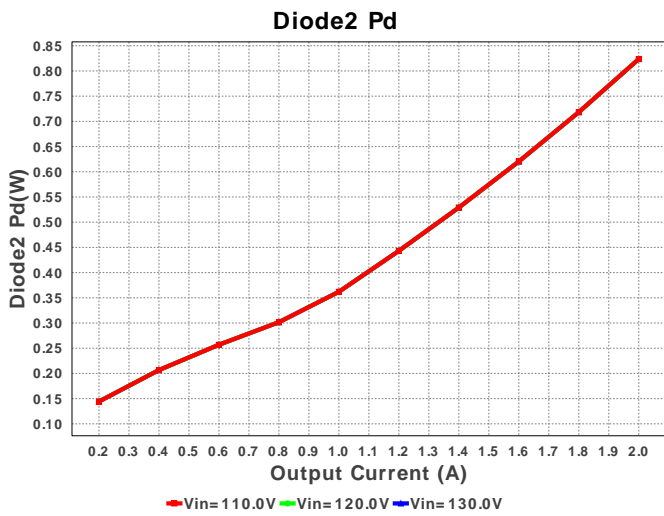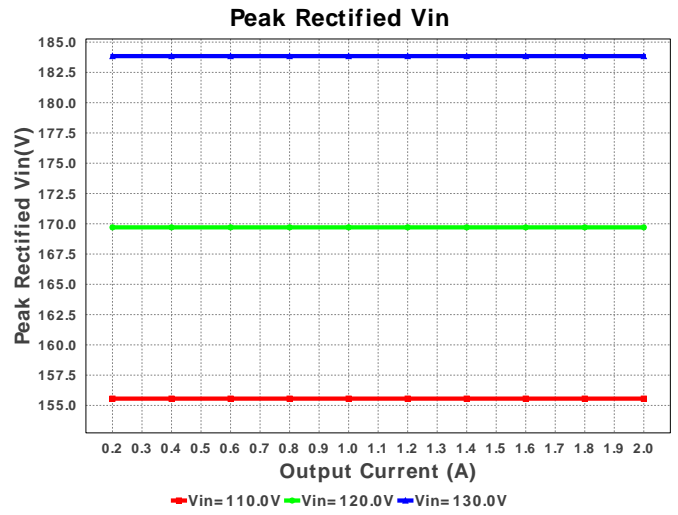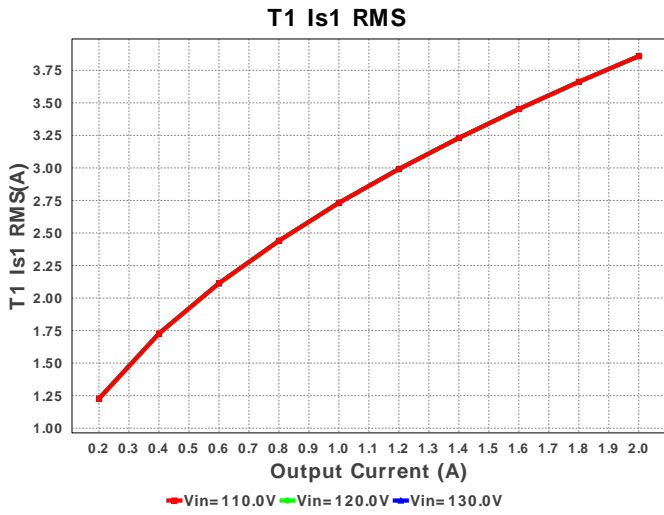


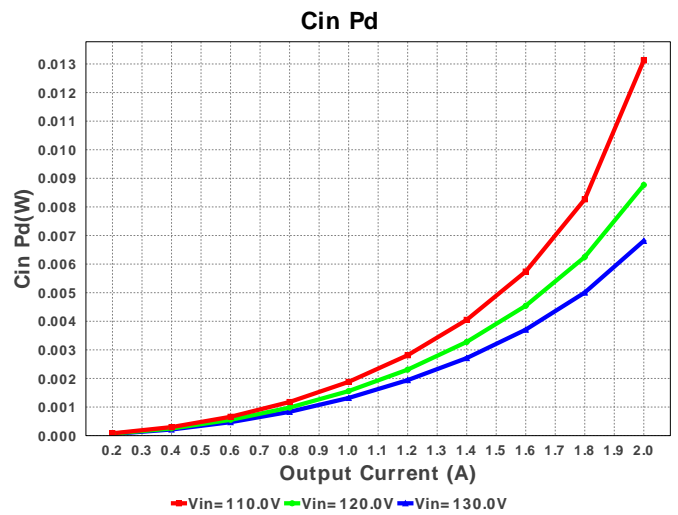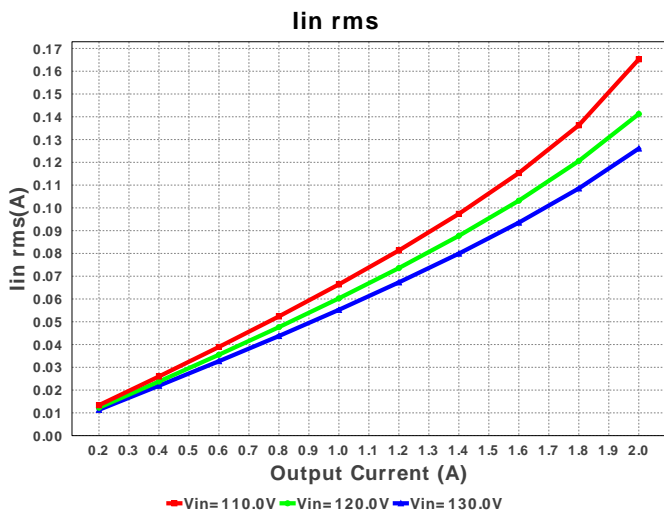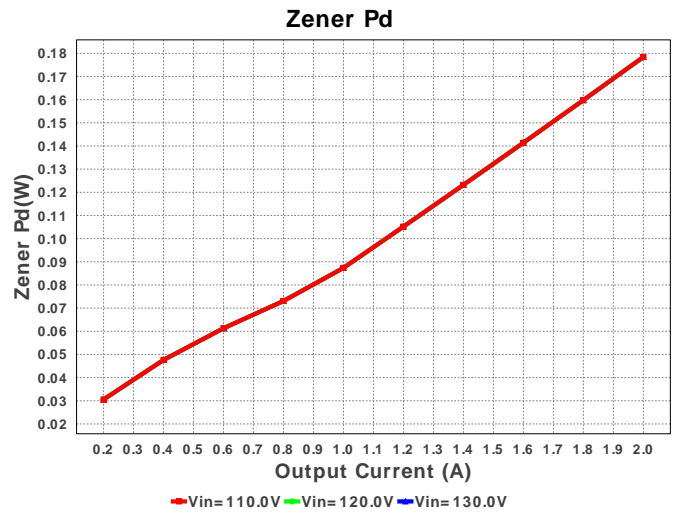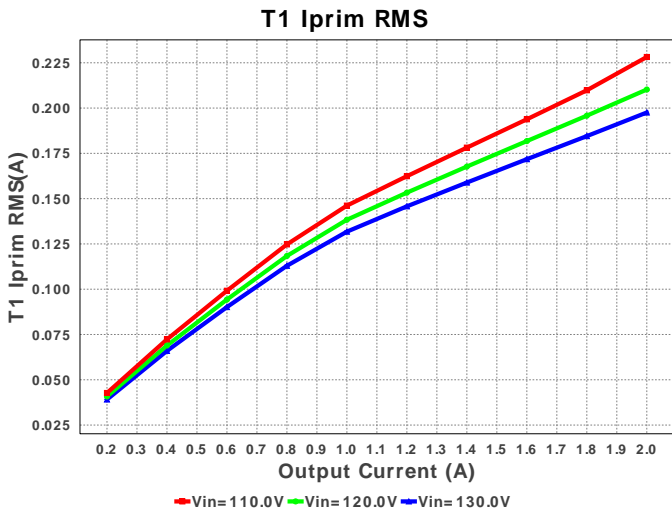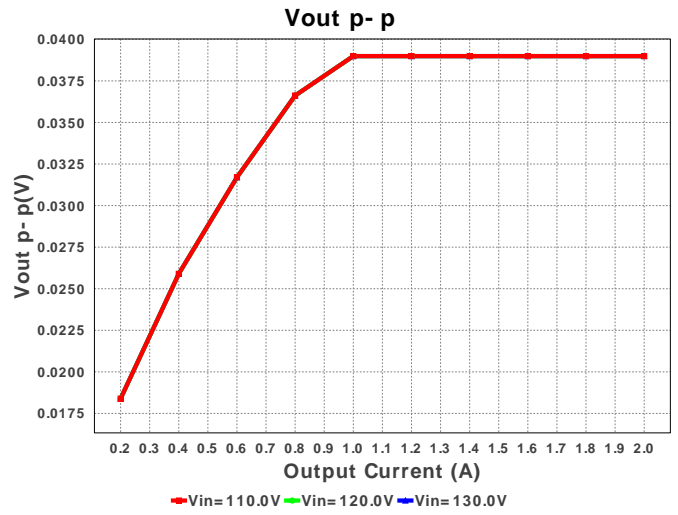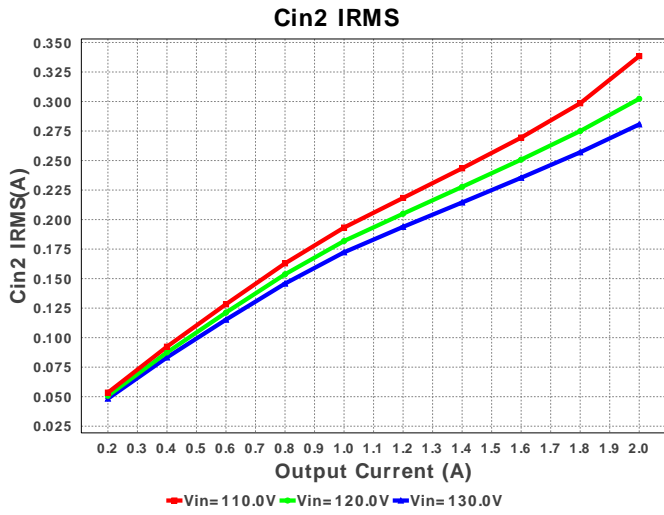

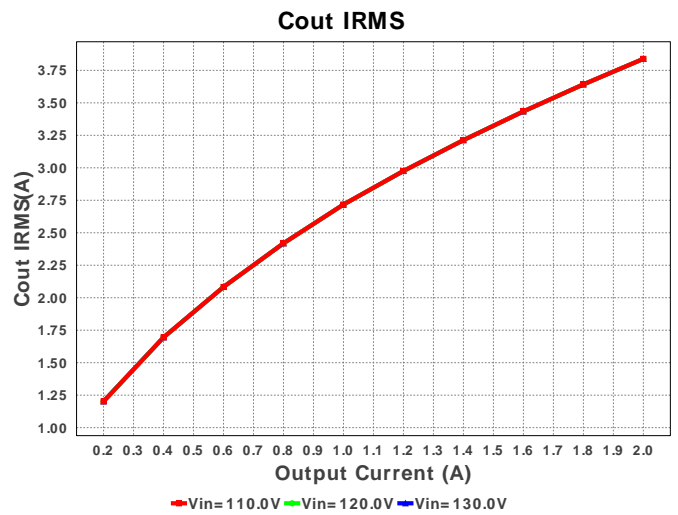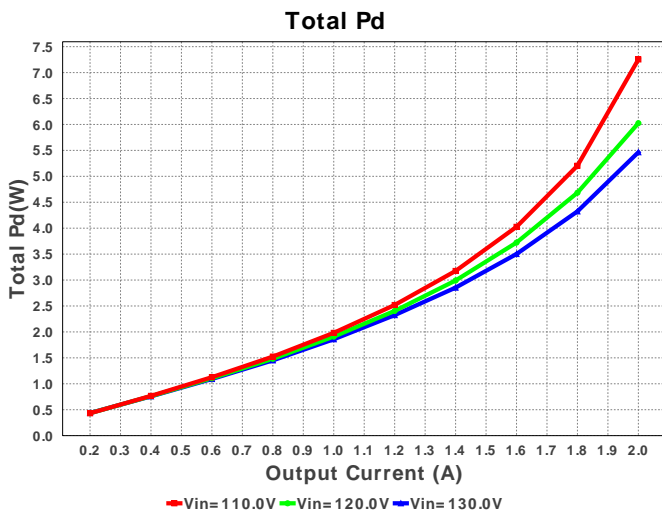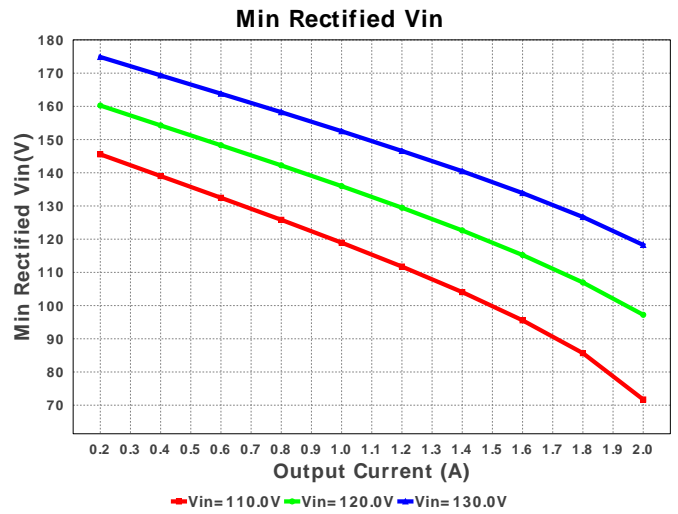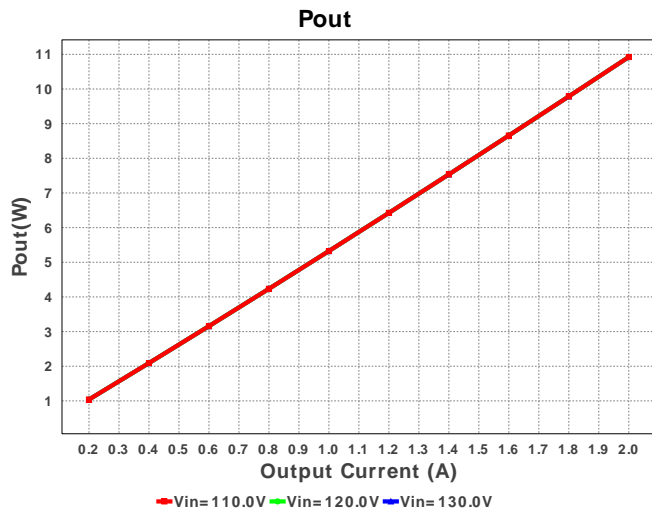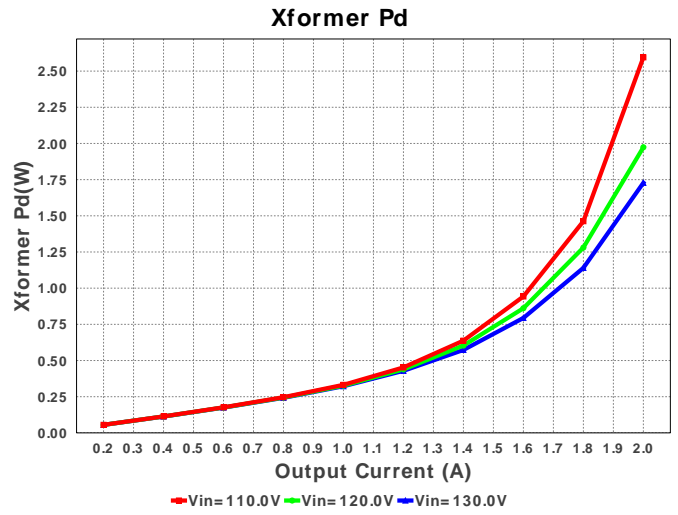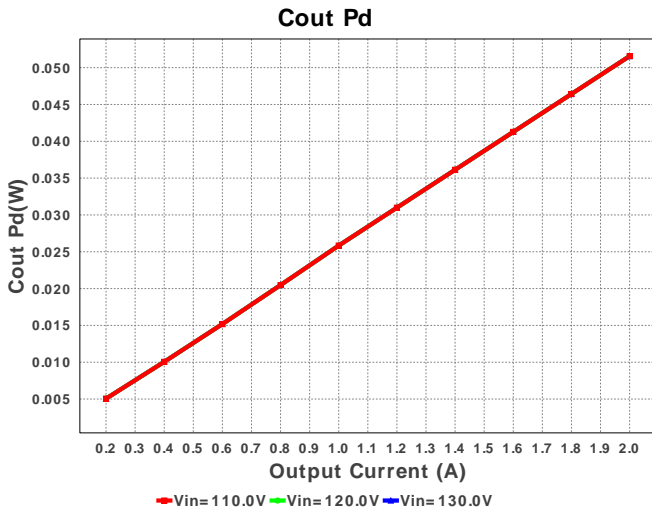

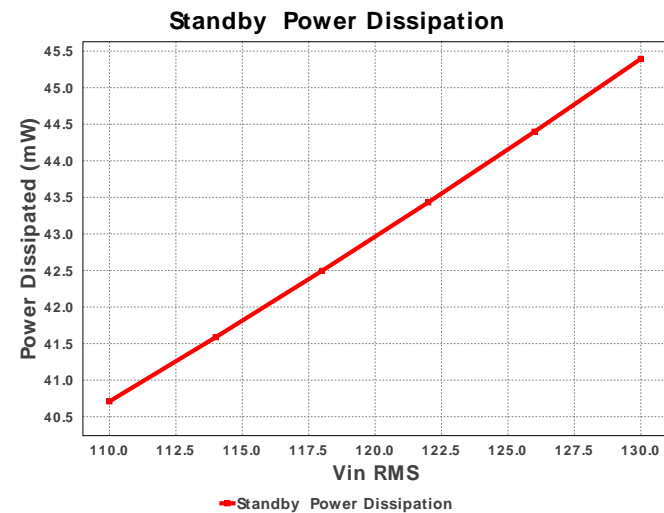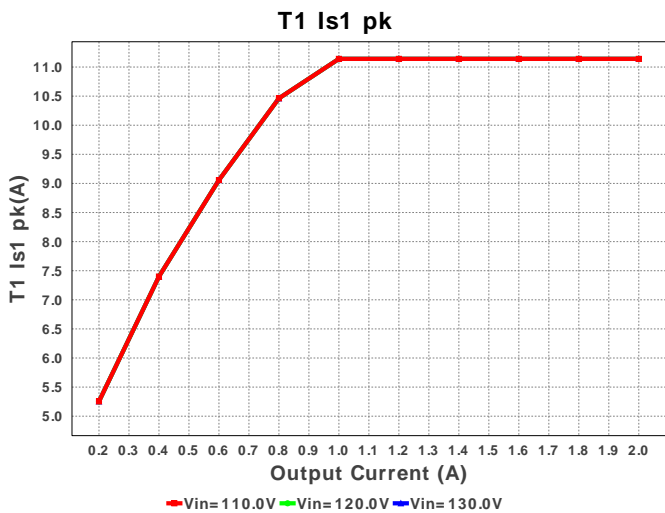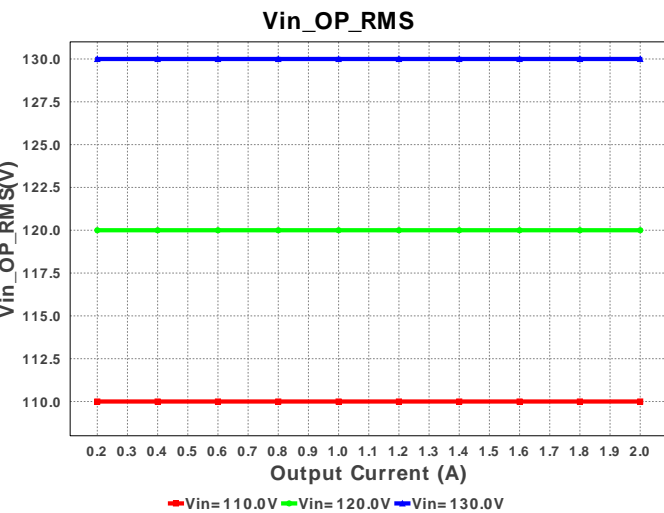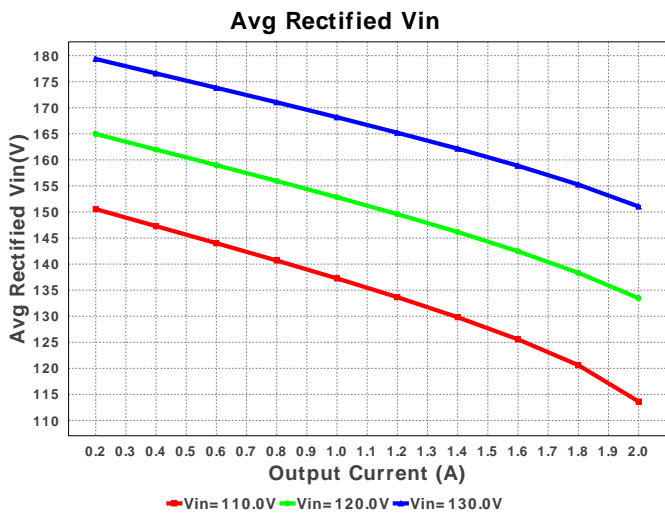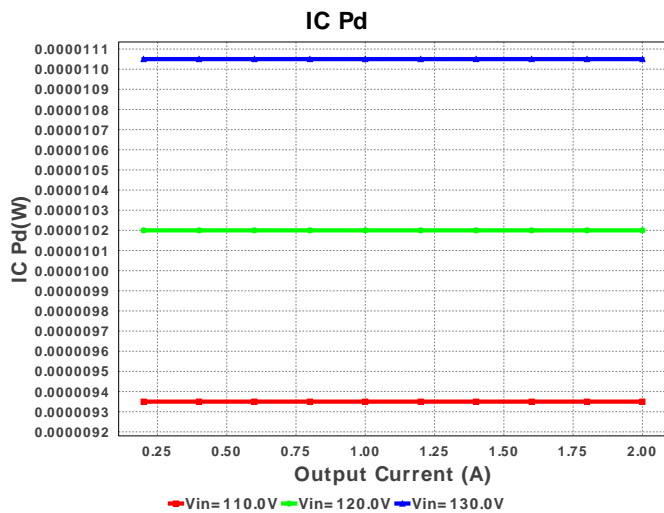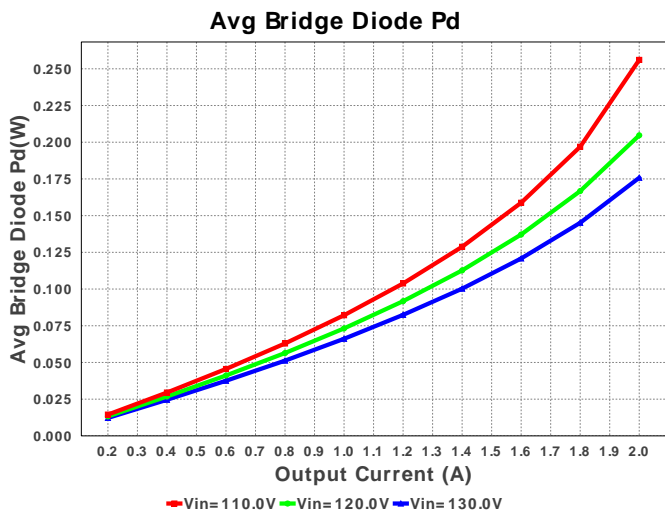



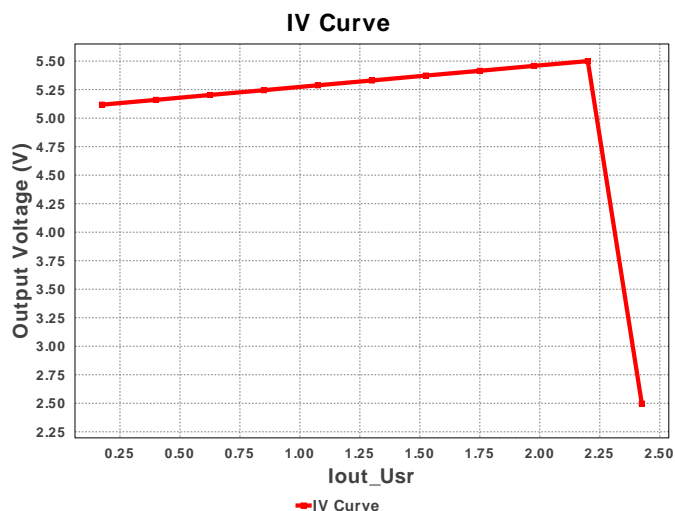

## Operating Values

#	Name	Value	Category	Description
1.	Cin IRMS	106.805 mA	Current	Input capacitor RMS ripple current
2.	Cin2 IRMS	280.155 mA	Current	Input Capacitor Cin2 RMS Ripple Current
3.	Cout IRMS	3.838 A	Current	Output capacitor RMS ripple current
4.	Iin rms	122.8 mA	Current	RMS Input Current
5.	Q1 Irms	1.755 A	Current	Q1 RMS current
6.	T1 Iprim RMS	200.251 mA	Current	Transformer Primary RMS Current
7.	T1 Iprim pk	600.0 mA	Current	Transformer Primary Peak Current
8.	T1 Is1 RMS	3.859 A	Current	Transformer Secondary1 RMS Current
9.	T1 Is1 pk	11.14 A	Current	Transformer Secondary1 Peak Current
10.	Avg Rectified Vin	149.071 V	General	Average Rectified Voltage for the AC Line Period
11.	BOM Count	29	General	Total Design BOM count
12.	FootPrint	1.007 k mm <sup>2</sup>	General	Total Foot Print Area of BOM components
13.	Pout	10.746 W	General	Total output power
14.	Total BOM	\$0.0	General	Total BOM Cost
15.	Q1 Tj	147.192 degC	Op_Point	Q1 Junction Temperature
16.	Vout OP	5.373 V	Op_Point	Operational Output Voltage
17.	Duty Cycle	33.417 %	Op_point	Duty cycle
18.	Efficiency	67.314 %	Op_point	Steady state efficiency
19.	Frequency	63.296 kHz	Op_point	Switching frequency
20.	IC Tj	30.001 degC	Op_point	IC junction temperature
21.	ICThetaJA	70.0 degC/W	Op_point	IC junction-to-ambient thermal resistance
22.	IOUT_OP	2.0 A	Op_point	Iout operating point
23.	Min Rectified Vin	114.296 V	Op_point	Minimum voltage seen at rectified input
24.	Peak Rectified Vin	183.846 V	Op_point	Peak voltage seen at rectified input
25.	Vin_OP_RMS	130.0 V	Op_point	AC Input RMS Voltage
26.	Vout p-p	38.991 mV	Op_point	Peak-to-peak output ripple voltage
27.	Avg Bridge Diode Pd	149.005 mW	Power	Average Power Dissipation in the Bridge Diode over the AC Line Period
28.	Cin Pd	6.562 mW	Power	Input capacitor power dissipation
29.	Cout Pd	51.564 mW	Power	Output capacitor power dissipation
30.	Diode2 Pd	1.003 W	Power	Diode2 power dissipation
31.	IC Pd	9.35 μW	Power	IC power dissipation
32.	Q1 Pd	1.887 W	Power	Q1 Power Dissipation
33.	Total Pd	5.218 W	Power	Total Power Dissipation
34.	Xformer Pd	1.466 W	Power	Transformer power dissipation
35.	Zener Pd	181.057 mW	Power	Zener power dissipation

## Design Inputs

#	Name	Value	Description
1.	Iout	2.0	Maximum Output Current
2.	Iout1	2.0	Output Current #1
3.	VinMax	130.0	Maximum input voltage
4.	VinMin	110.0	Minimum input voltage
5.	Vout	5.0	Output Voltage
6.	Vout1	5.0	Output Voltage #1
7.	line_fsw	60.0	Light Output in Lumen
8.	base_pn	UCC28722	Base Product Number
9.	source	AC	Input Source Type
10.	Ta	30.0	Ambient temperature

## Design Assistance



1. Application Hints Rbld Rbld is used to set a minimum load for the circuit, so that in standby the output voltage does not float up. The value chosen by WEBENCH should be a good starting point but may need to be adjusted to achieve minimum power dissipation at standby as well. Rlc Rlc provides the function of feed-forward line compensation to eliminate change in IPP due to change in di/dt and the propagation delay of the internal comparator and MOSFET turn-off time. For best results the chosen value may need to be adjusted based on board, FET and transformer parasitics. Rcbc Rcbc is used to set the amount of output voltage compensation to offset cable resistance. Connecting this resistor from the CBC pin to GND will program a current that is summed into the VS feedback divider, increasing the regulation voltage as Iout increases. Rcbc may be left unpopulated if voltage compensation is not required. Rfbb & Rfbb The feedback resistors will set the output voltage of the circuit. The values chosen may need to be fine tuned based on the final Transformer turns ratios and the voltage across the output diode at close to zero current. Clamping Diode at VDD pin Depending on the startup resistor, an additional zener diode connected to the VDD pin may be required at light load and high line conditions. This is to prevent the voltage at VDD from running away since the IC would not consume all the current that passes through the startup resistor. Part Description The UCC28700 family of flyback power supply controllers provides Constant-Voltage (CV) and Constant-Current (CC) output regulation. Primary-Side Regulation (PSR) eliminates the use of an Opto-Coupler. Please see the datasheet for further design guidance. <http://www.ti.com/lit/ds/symlink/ucc28722.pdf>

2. **UCC28722** Product Folder : <http://www.ti.com/product/UCC28722> : contains the data sheet and other resources.

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

**You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.**

Use of Texas Instruments' WEBENCH simulation tools is subject to [Texas Instruments' Site Terms and Conditions of Use](#). Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the [Evaluation License Agreement](#).